


3 PANEL SHAKER EQUAL MOLDED DOORS

SMOOTH

8'0" SQUARE

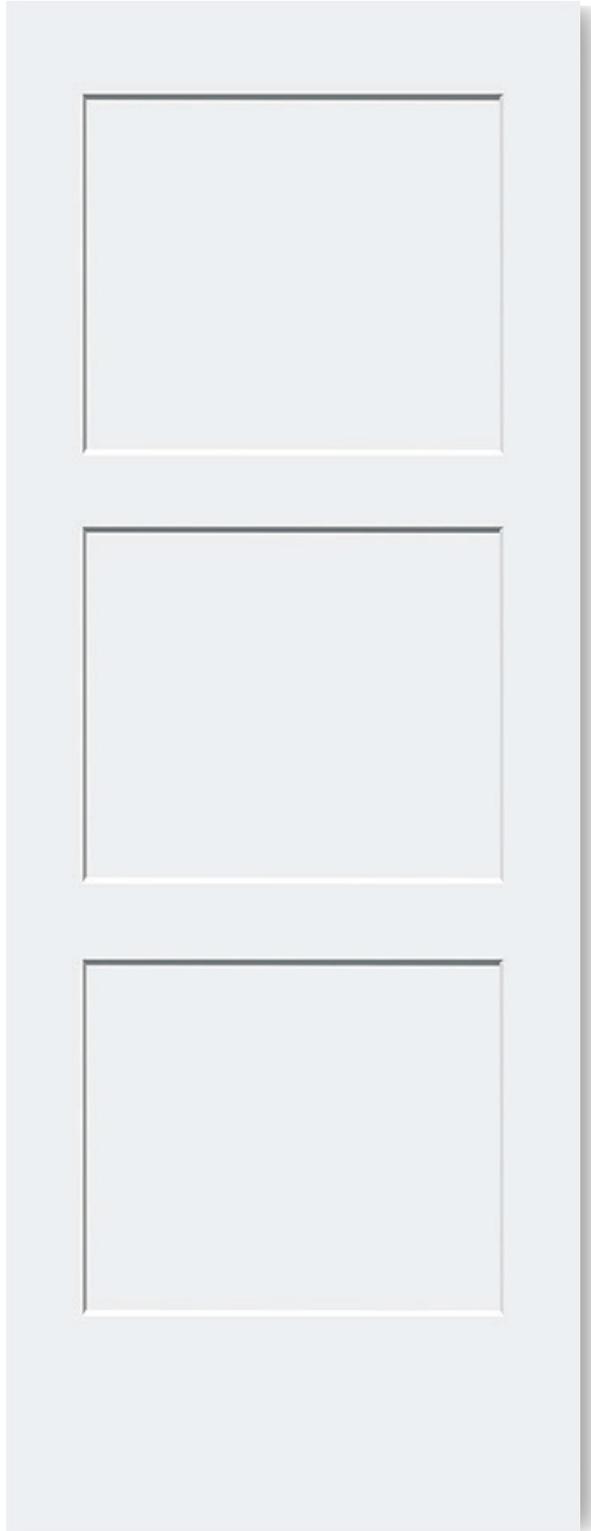


HOLLOW CORE DOOR

- 1-3/8" and 1-3/4" hollow core
- Fiberwood or Fingerjoint stiles and rails

SOLID CORE DOOR

- 1-3/8" and 1-3/4" solid core
- Gives solid feel with sound reduction
- Fingerjoint stiles and rails



Square profile

Sizes Available

| Dimensions | Availability | Panels |
|--------------|--------------|--------|
| 1'4" x 8'0" | X | 3 |
| 1'6" x 8'0" | X | 3 |
| 1'8" x 8'0" | X | 3 |
| 1'10" x 8'0" | √ | 3 |
| 2'0" x 8'0" | √ | 3 |
| 2'2" x 8'0" | * | 3 |
| 2'4" x 8'0" | √ | 3 |
| 2'6" x 8'0" | √ | 3 |
| 2'8" x 8'0" | √ | 3 |
| 2'10" x 8'0" | √ | 3 |
| 3'0" x 8'0" | √ | 3 |

NOTE: Items designated with an X are cut from larger size skins.
 Items designated with a √ are available for order. NA for Not Available.
 Items designated with an * call for availability.


3 PANEL EQUAL SHAKER MOLDED DOORS

SMOOTH 8'0" SQUARE




Standard Dimensions


DOOR SKIIN DIMENSIONS*

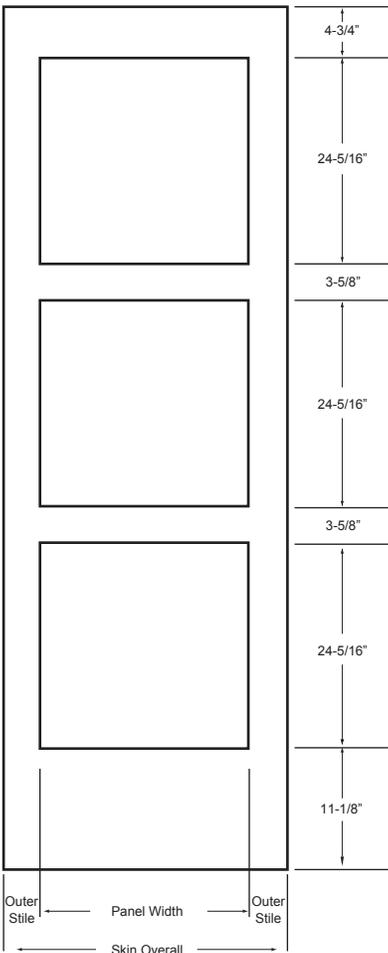

HOLLOW CORE CONSTRUCTION

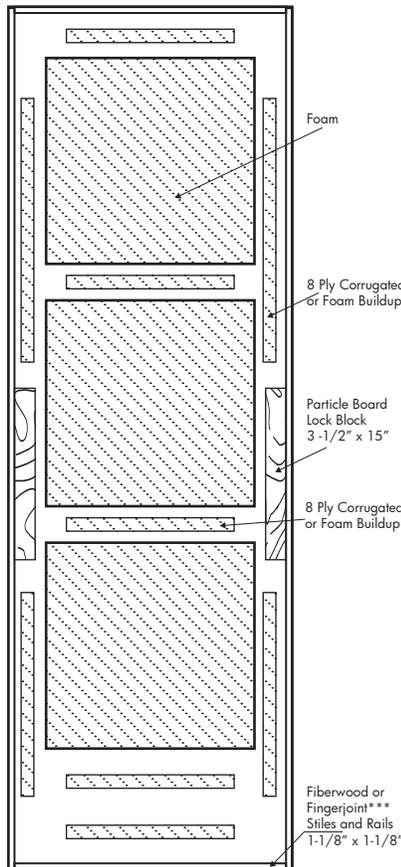

SOLID CORE CONSTRUCTION

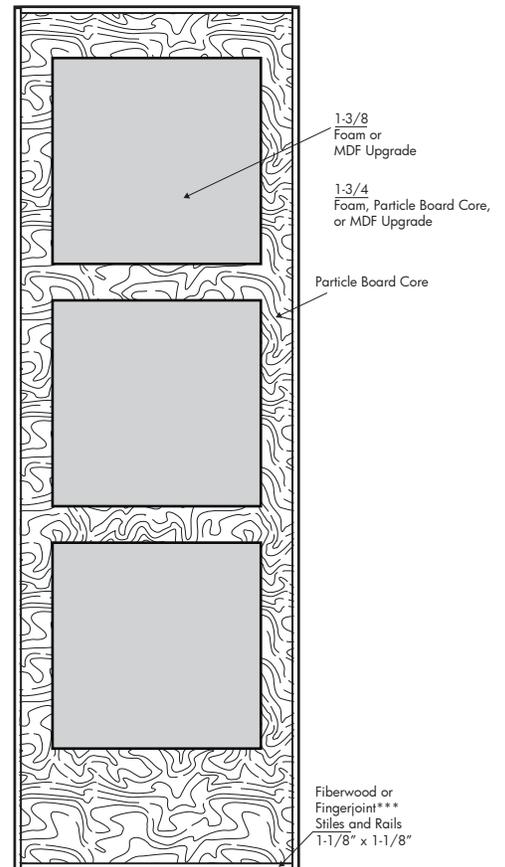

Smooth skin faces are paint grade only.
All measurements are approximate.
All door facings are nominal 1/8" thick.
Type 2 glue bond standard.

*Measurements are approximate and before any required trim or adjustments for customer specifications

| Skin Size | Skin Overall | Panel Width | Center Stile | Outer Stile |
|--------------|--------------|-------------|--------------|-------------|
| 1'4" x 8'0" | 1'4-3/8" | 9 1/4" | NA | 3 3/8" |
| 1'6" x 8'0" | 1'6-3/8" | 9 1/4" | NA | 4 3/8" |
| 1'8" x 8'0" | 1'8-3/8" | 11 1/2" | NA | 4 1/4" |
| 1'10" x 8'0" | 1'10-3/8" | 11 1/2" | NA | 5 1/4" |
| 2'0" x 8'0" | 2'0-3/8" | 15 1/2" | NA | 4 1/4" |
| 2'2" x 8'0" | 2'2-3/8" | 15 1/2" | NA | 5 1/4" |

| Skin Size | Skin Overall | Panel Width | Center Stile | Outer Stile |
|--------------|--------------|-------------|--------------|-------------|
| 2'4" x 8'0" | 2'4-3/8" | 18 1/2" | NA | 4 3/4" |
| 2'6" x 8'0" | 2'6-3/8" | 20 1/2" | NA | 4 3/4" |
| 2'8" x 8'0" | 2'8-3/8" | 22 1/2" | NA | 4 3/4" |
| 2'10" x 8'0" | 2'10-3/8" | 22 1/2" | NA | 5 3/4" |
| 3'0" x 8'0" | 3'0-3/8" | 26 1/2" | NA | 4 3/4" |

Note: A standard 2-1/8" bore diameter will require a minimum stile measurement of 3-11/16" to allow for a 2-3/8" backset. A standard 2-1/8" bore diameter will require a minimum stile measurement of 4-1/16" to allow for a 2-3/4" backset.