


# 2000 SERIES STANDARD DUTY SVR EXIT DEVICE

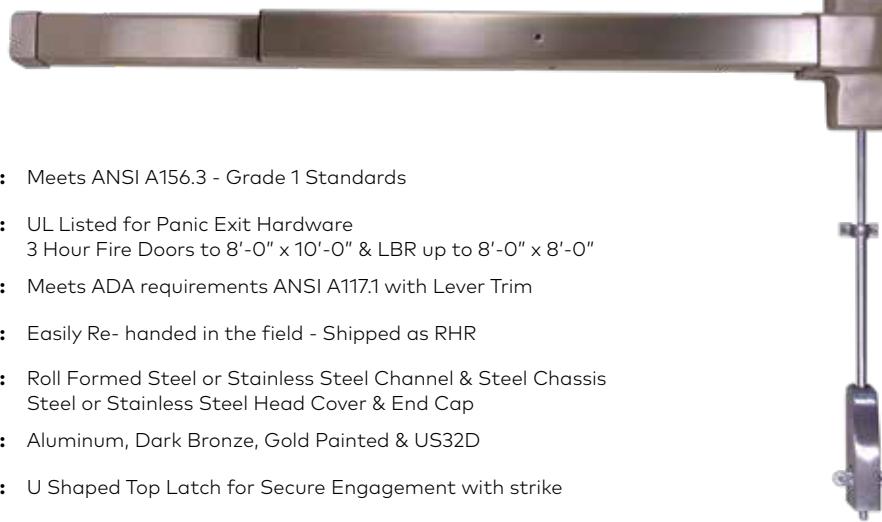

## Specification

**ANSI:** Meets ANSI A156.3 - Grade 1 Standards

**UL Listings:** UL Listed for Panic Exit Hardware  
3 Hour Fire Doors to 8'-0" x 10'-0" & LBR up to 8'-0" x 8'-0"

**ADA:** Meets ADA requirements ANSI A117.1 with Lever Trim

**Handing:** Easily Re- handed in the field - Shipped as RHR

**Construction:** Roll Formed Steel or Stainless Steel Channel & Steel Chassis  
Steel or Stainless Steel Head Cover & End Cap

**Finishes:** Aluminum, Dark Bronze, Gold Painted & US32D

**Top Latch:** U Shaped Top Latch for Secure Engagement with strike

**Bottom Latch:** Drop Bolt Style Bottom Latch Secures into flat strike & hole in the floor

**Dogging:** 5/32" Hex Key Dogging Standard on Panic Exit Hardware

**Device Lengths:** 33" for 3'-0" wide doors and 42" for 3'-8" to 4'-0" wide doors

**Min. Door Width:** 33" device can be cut down to fit on 2'-8" wide door  
42" device can be cut down to fit on 3'-4" wide door

**Door Heights:** 7"-0" Standard - Extended Top Rods available for up to 10'-0" tall doors

**Center Case Dim.:** 6" Height x 2 5/16" Wide x 2 1/2" Thick - 4" Minimum stile required

**Mechanism Case Dim.:** 15/8" Height x 1 13/16" Wide

**Projection:** 2 1/2" Undogged - Push bar Neutral & 1 13/16" Dogged - Push bar Depressed

**Fasteners:** Wood, machine & self tapping machine screws (F2000V includes thru bolts)

**Trim & Accessories:** Latch filler included, Exterior Trims, Shim Kits & other accessories available

**Under Cut:** 1/4" door under cut recommended for 1/4" threshold or no threshold openings

**Warranty:** Limited lifetime warranty