




OmniRidge®

Model OR4-N

Nails Included!

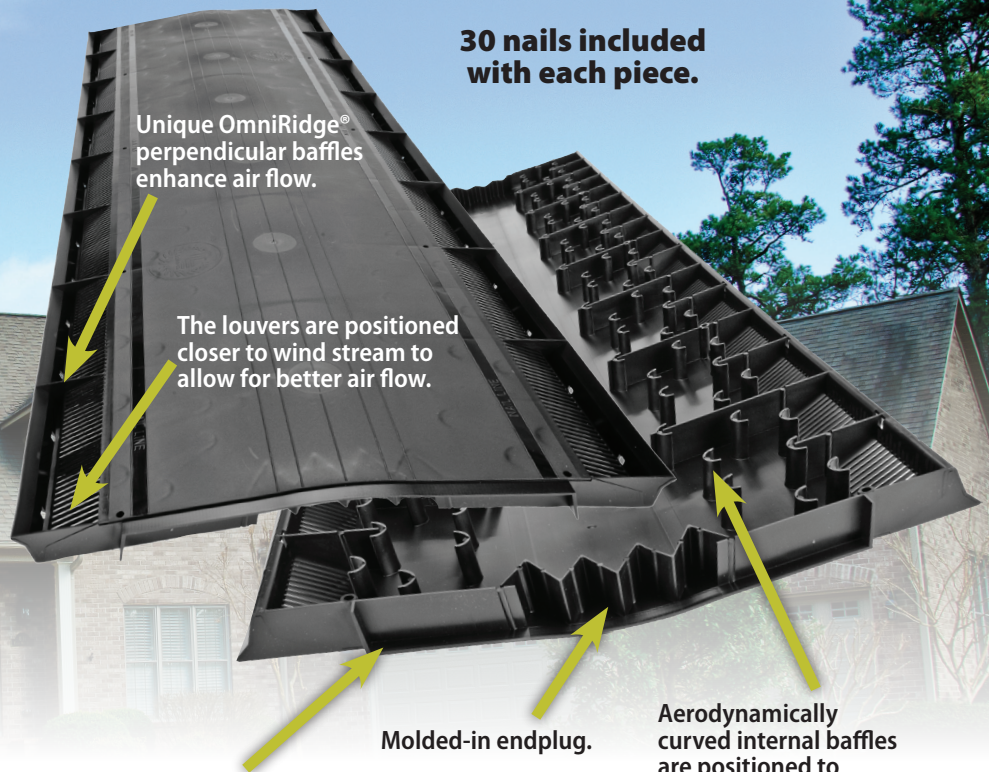

Unique OmniRidge® perpendicular baffles enhance air flow.

The louvers are positioned closer to wind stream to allow for better air flow.

30 nails included with each piece.

Molded-in endplug.

Aerodynamically curved internal baffles are positioned to enhance the airflow from the attic space.

The OmniRidge® underlap prohibits weather infiltration.

The Shingle-Over Ridge Vent with Proven Performance!

OR4-N FEATURES:

- 2 -1/2" ring shank nails included and attached with each piece.
- Internal aerodynamic curved baffles.
- External perpendicular omni baffles.
- Weatherproof underlapping joint.
- Four drain holes per foot per side.
- 18 square inches of Net Free Area per linear foot.
- External venturi baffle.
- Pre-formed to 3/12 pitch.
- 10 supported nail holes.
- Molded nail lines.
- Alignment tabs.
- External water shield.
- Slot width guide lines.
- Molded-in fanfolded endplug fits all roof pitches.
- **Lifetime Limited Warranty.**



Model	Length (ft.)	NFA (in. ²)	Roof Pitch	Packaged
OR4-N	4'	72	2/12 To 16/12	10 Per Box

How many OR4-N vents do you need?

ATTIC FLOOR SPACE IN SQ FT:		1000								1500								2000								2500								3000								3500							
EXHAUST SYSTEM	Intake								Intake								Intake								Intake								Intake								Intake								
	Exhaust	C416	C616	C816	105/190	140	SV-10	DA-4/IV-9	Exhaust	C416	C616	C816	105/190	140	SV-10	DA-4/IV-9	Exhaust	C416	C616	C816	105/190	140	SV-10	DA-4/IV-9	Exhaust	C416	C616	C816	105/190	140	SV-10	DA-4/IV-9	Exhaust	C416	C616	C816	105/190	140	SV-10	DA-4/IV-9	Exhaust	C416	C616	C816	105/190	140	SV-10	DA-4/IV-9	
	14'	11	7	4	4	3	4	7	20'	15	10	6	5	5	6	10	27'	20	14	8	7	6	8	14	34'	25	17	10	9	7	10	17	40'	29	20	12	10	9	12	20	47'	34	23	14	12	10	14	24	
	OR4-N																																																